


Outdoor strobe: TW 1320 pcs, RGBW 1320 pcs

Features



- Outdoor strobe
- TW SMD 5050 4in1 RGBW 0.8W LEDs X 1320 pcs
- 6 block pixel control, every block is 220pcs led
- 120° beam angle
- IP65 rated
- Flicker-free
- Silent working

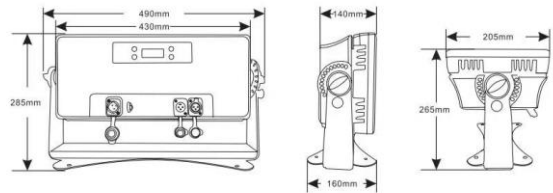

Technical Specifications

SPECIFICATION

Power consumption: 1200W
 Input voltage: AC 110V-250V,50-60Hz
 Working position: any safe working position
 Working position temperature: -10-40deg

Light source: TW SMD5050 4in1 RGBW 0.8W*1320pcs
 6 blocks , every block is 220pcs
 Lifetime: >100,000hours
 CCT: 7000K
 Beam angle: 120deg

Dimmer: 0-100 linear dimmer system
 Pixel control : 6 blocks dot matrix
 Strong strobe , good effect light
 Working silently, no noise
 Flicker-free

CONTROL

Display: LCD display
 DMX channel: 4/5/7/13/15/31 CHs
 Control mode: Master /Slave synchronization, Stand-alone mode, sound mode and DMX512 control mode

CONSTRUCTION

DMX link: Seetronic IP65 3pin DMX in and out
 Power link: Seetronic IP65 powercon in
 Protection rate: IP65, indoor and outdoor use
 Housing: Die-casting aluminum housing, black/silver/white color, optional

PHYSICAL

Dimension: 490*160*285mm
 Net Weight: 12.7 kgs
 Gross weight: 15.5kgs